RX-2505PW AC-PV-WIND BATTERY



The RX-2505PW is an on and off grid energy storage system designed to achieve the highest efficiency using Redx patented FWS inverter technology.

With embedded VPP hardware and software, it provides ultimate speed on cloud-based, real-time control and monitoring functions.

The RX-2505PW has on and off grid capabilities with a solar and wind inputs as standard. Low voltage PV and wind inputs provide very safe installations for small homes, remote sheds and trailer homes applications.



Australian designed



High efficiency




VPP ready



On/Off grid functions

HOME BACK-UP

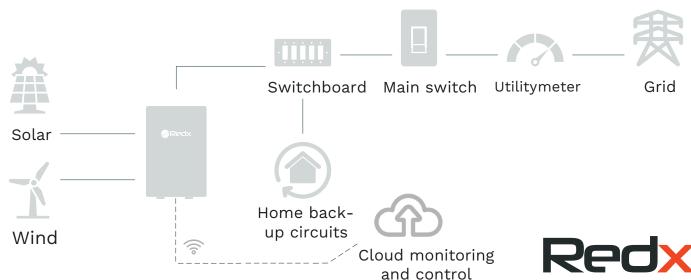

AC OUTPUT	
Max. outputpower (10 seconds)/(Continuous)	2750W/2500W
Nominal outputvoltage (off grid)	230V
Total THD	<3%
Frequency (off grid)	50Hz +/- 0.1Hz
Output power factor	0.8 leading-0.8 lagging
Max efficiency (battery to AC output)	96.00%
Round trip efficiency	92.00%
Max output current	12A

AC INPUT	
Nominalinputvoltage	230V +/- 15%
Nominal line frequency	50Hz + / -10%
Switchingtime (on grid/off grid)	<50ms
Max input current (charge mode	22A
0.3C)	

BATTERY PACK	
Battery capacity	5.12kWh
Nominal battery voltage	48V
Max battery voltage	55V
Min battery voltage	42V
Max discharge current	70A
Max charge current (0.5C)	30A

DC INPUT	
DC1 Input Voltage (regulated)	48-52V
DC1 Max Current	25A
DC2 Input Voltage (regulated)	48-52V
DC2 Max Current	25A

GENERAL	
Internal on/off grid switch	Yes
Protections	Full protection functions
Operating temperature range (system)	0° to +50°
Current sensors	Two CT current sensors
InternalSwitches	Battery
Internal communication port	RS485
Display/indicators	Yes
Cooling	Air Cooling
Embedded software package (optional)	VPP and Peak Shaving
Warranty	10 years
Size	600W x 900H x 145D
Weight	75kg
Communication	RS485, Wi-Fi, 4G*
Safety and EMC	AS4777.2, IEC-62040-1, AS5139, IEC62109-1, EN61000.6.3:2007
Certification	SAA, CE
IP Rating	IP32

Illustration and performance data in this document are for reference only.

Materials and specifications are subject to change without notice.

For more information, phase visit: www.redx.com.au





*Wi-fi communication is included in the product by default.

4G connectivity will require the use of a dedicated Redx 4G module.

